# RACD20/277







# RATED POWER

20W max.

### **FEATURES**

- Power Factor Corrected
- IP66 Rating
- Low Cost

CERTIFIC	CATION	INPUT	DIMMING	PROTECTION	MODEL	CC OUTPUT 🗸
CE	✓	115VAC 🗸	0-10V <b>X</b>	Over- Voltage	RACD20-350/277	350mA 28-57VDC
UL	✓	230VAC 🗸	PWM X	Short- Circuit	RACD20-500/277	500mA 20-40VDC
EN	✓	277VAC 🗸	Resistor <b>X</b>	Over- Load	RACD20-700/277	700mA 14-29VDC
EMC	✓	AC or DC 🗸	Triac Dimming <b>X</b>	Over- Temp.	RACD20-1050/277	1050mA 18.8-19VDC

#### MECHANICAL CHARACTERISTICS

Size 80 x 74 x 26.5mm

Weight 195g


Connection Wires

## TEMPERATURE CHARACTERISTICS

Operating Temperature -20°C to +50°C

Case Temperature (Tc) +90°C max.

#### INSTALLATION

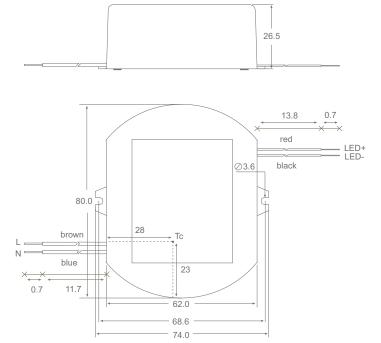

www.recom-lighting.com REV 1/2012