


# RACD60

LED DRIVER

**RECOM**  
LIGHTING

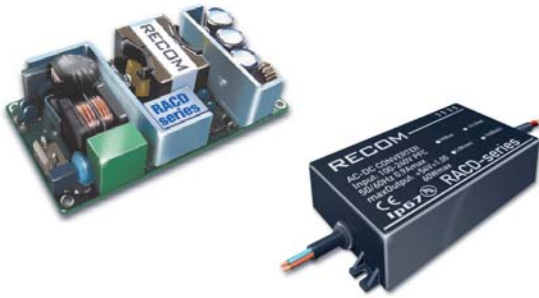

## RATED POWER

60W max.

## FEATURES

- Open Frame or IP67
- PF > 0.9
- 5 Year Warranty

CERTIFICATION	INPUT	DIMMING	PROTECTION	MODEL	CC OUTPUT ✓	CV OUTPUT ✓
CE ✓	115VAC ✓	0-10V ✓	Over-Voltage ✓	RACD60-4200/(T)OF RACD60-4200/IP67	3570-4200mA 4200mA 11-13.5V	13.5VDC 0-3500mA
UL ✓	230VAC ✓	PWM ✓	Short-Circuit ✓	RACD60-2400/(T)OF RACD60-2400/IP67	2150-2500mA 2400mA 17-24V	24VDC 0-2100mA
EN ✓	277VAC X	Resistor ✓	Over-Load ✓	RACD60-2100/(T)OF RACD60-2100/IP67	1400-2140mA 2100mA 21-28V	28VDC 0-1300mA
EMC ✓	AC or DC ✓	Triac Dimming X	Over-Temp. ✓	RACD60-1400/IP67	1400mA 21-28V	28VDC 0-1300mA
				RACD60-1050/(T)OF RACD60-1050/IP67	1700-1050mA 1050mA 38-54V	54VDC 0-1000mA
				RACD60-700/IP67	700mA 38-54V	54VDC 0-1000mA

## MECHANICAL CHARACTERISTICS

Size	(/TOF, /OF Version) (/IP67 Version)	101.6 x 50.8 x 28mm 118 x 60 x 35mm
Weight	(/TOF, /OF Version) (/IP67 Version)	165g 200g
Connection	(/TOF, /OF Version) (/IP67 Version)	Pin Header Wired

## TEMPERATURE CHARACTERISTICS

Operating Temperature	-30°C to +50°C
Case Temperature (/IP67 Version)	85°C max.

### RACD60 Versions:

- /OF Open Frame, Adjustable Iout
- /TOF Open Frame, Thermal Dimming
- /IP67 IP67 sealed Standard

Output Currents: 700, 1100, 1400, 2100, 2400 & 4200 mA

## INSTALLATION

