RACV30





RATED POWER 30W nom.

FEATURES

- Power Factor Corrected
- Constant Voltage Output
- 5 Year Warranty

CERTIFI	CATION	INPUT	DIMMING	PROTECTION	MODEL	CV OUTPUT 🗸
CE	✓	115VAC 🗸	0-10V X	Over- Voltage	RACV30-12	12VDC 0-2500mA
UL	√	230VAC 🗸	PWM X	Short- Circuit	RACV30-24	24VDC 0-1250mA
EN	✓	277VAC X	Resistor X	Over- Load		U-IZDUIIA
EMC	√	AC or DC 🗸	Triac Dimming X	Over- Temp.		

MECHANICAL CHARACTERISTICS

Size 160 x 50 x 22mm

Weight RACV30-12 170g RACV30-24 167g


Connection Screw Terminal

TEMPERATURE CHARACTERISTICS

Operating Temperature -20°C to +50°C

Case Temperature (Tc) 85°C max.

INSTALLATION

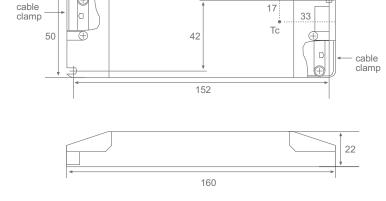







www.recom-lighting.com REV 1/2012