

RCD-48

Step-down DC LED DRIVER


RECOM
LIGHTING

RATED POWER

70W max.

FEATURES

- Wide Input and Output Voltage
- Analogue and Digital (PWM) Dimming down to 0%
- Pinned or Wired Versions
- 5 Year Warranty

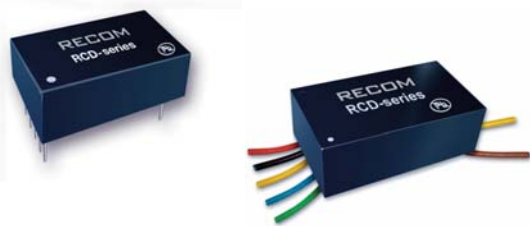

CERTIFICATION	INPUT	DIMMING	PROTECTION	MODEL	CC OUTPUT ✓
CE ✓	115VAC ✗	Analogue ✓	Over-Voltage ✗	RCD-48-0.35	350mA
UL ✓	230VAC ✗	PWM ✓	Short-Circuit ✓	RCD-48-0.50	500mA
EN ✓	277VAC ✗	Resistor ✓	Over-Load ✓	RCD-48-0.70	700mA
EMC ✗	DC ✓		Over-Temp. ✓	RCD-48-1.00	1000mA
				RCD-48-1.20/M	1200mA

MECHANICAL CHARACTERISTICS


Size	32.6 x 16.65 x 11.1mm
Weight	16g
Connection	Pinned (no Suffix) Wired (/W Suffix)

TEMPERATURE CHARACTERISTICS

Operating Temperature	350, 500mA	-40°C to +80°C
	700mA	-40°C to +75°C
	1000mA	-40°C to +50°C
	1200mA	-40°C to +60°C
Case Temperature (Tc)		+100°C max.

INSTALLATION

Pinned Version

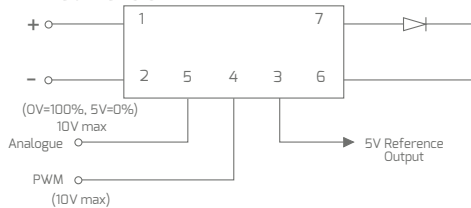

Wired Version




Resistor Dimming



DIMENSIONS

Pinned Version

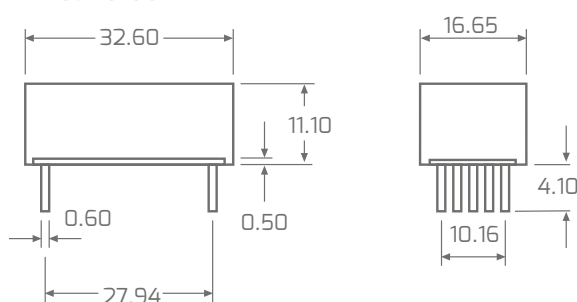

Wired Version

